


DK-20e

Main data

Cylinder bore : 200mm
 Piston stroke : 300mm
 No. of cylinder : 5, 6, 8
 Pme : 2.16~2.45MPa
 Piston speed : 9.00m/sec. (at 900min⁻¹)
 7.20m/sec. (at 720min⁻¹)
 Fuel oil : MDO~up to 700mm²/s/50°C HFO

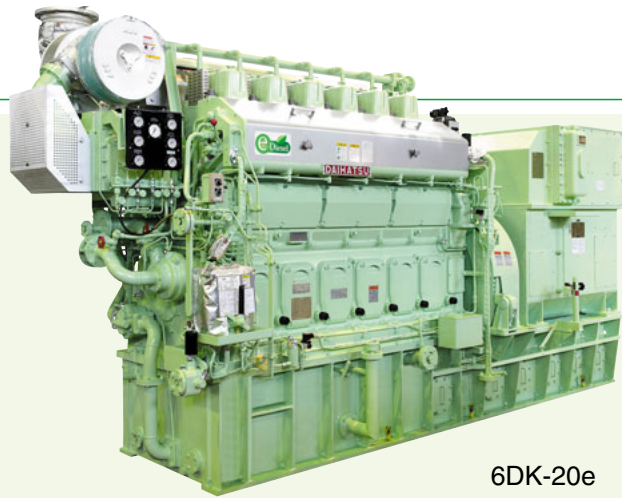

6DK-20e

PRINCIPAL PARTICULARS

Model	Output	Fuel oil	H.O. 700 ~ 180mm ² /s /50°C			Diesel oil		
		Rev. (min ⁻¹)	720	750	900	720	750	900
5DK-20e	Engine	kW	610	610	800	610	610	800
	Generator	kW	580	580	760	580	580	760
6DK-20e	Engine	kW	800	800	1040	800	800	1040
	Generator	kW	760	760	990	760	760	990
8DK-20e	Engine	kW	1065	1065	1360	1065	1065	1360
	Generator	kW	1010	1010	1290	1010	1010	1290

Generator output based on a generator efficiency of 95%.

DIMENSIONS & WEIGHTS

Model	Mark	(mm)								(ton)	
		A	B	C	D	E	F	G	H	J	Dry Weight Total*
5DK-20e		4850	2670	1670	960	3980	1000	1575	1100	1725	13.5
6DK-20e		5480	2890	1800		4430			2035	16.0	
8DK-20e		6350	2890	5300		2655			22.0		

* Depending on alternator maker

