
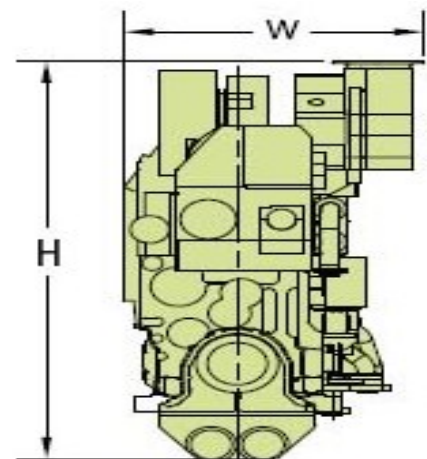


L35/44DF

Bore 350 mm, Stroke 440 mm						
Speed (r/min)		750		720		
Mean eff. pressure (bar)		20.0		20.1		
Model		Engine (kW)		Engine (kW)		
6L35/44DF		3,180		3,060		
7L35/44DF		3,710		3,570		
8L35/44DF		4,240		4,080		
9L35/44DF		4,770		4,590		
10L35/44DF		5,300		5,100		
Consumption						
MCR		100%		85%		
Liquid fuel consumption (g/KWh)		183		181.5		
Gas Heat Rate (KJ/KW)		7,530		7,645		
Lube oil consumption (g/KWh)		0.5		0.5		
Liquid fuel: HFO or Diesel fuel.						
LHV of fuel Gas: $\geq 32400 \text{KJ/Nm}^3$ (Nm^3 corresponds to one cubic meter of gas at 0°C and 1.013 bar).						
Dimensions						
Cyl. No.		6	7	8	9	10
L	mm	6,323	6,924	7,454	7,984	8,603
L_1	mm	5,276	5,877	6,407	6,937	7,556
W	mm	2,490	2,675	2,675	2,675	2,675
H	mm	4,163	4,369	4,369	4,369	4,369
Dry mass	t	40.5	45.6	50.7	55.0	59.7
Minimum centreline distance for twin engine installation: 2,500mm.						

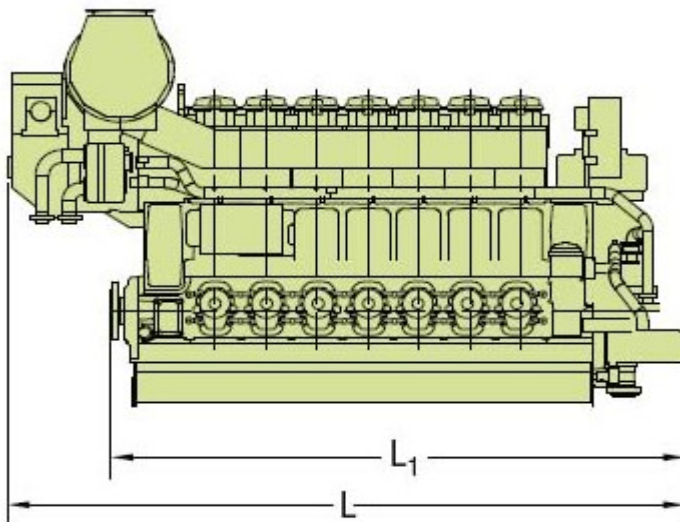

URL: <http://www.soarpower.com>

E-mail: sale@soarpower.com

Phone: +86-4006170048