




MHI Gas Generator Sets Specification

KU30GSI

Bore 300 mm, Stroke 380 mm					
Speed	r/min	750		720	
Frequency	Hz	50		60	
Rate output(Generator terminal)					
Gensets Model		Gensets	Engine	Gensets	Engine
12KU30GSI	KW	3800	3952	3650	3780
14KU30GSI	KW	4450	4610	4250	4410
16KU30GSI	KW	5100	5269	4900	5040
18KU30GSI	KW	5750	5928	5500	5670
Consumption					
Cylinders No.		12	14	16	18
Gas Consumption	Nm ³ /kw.h	0.1816		0.1818	
Electrical Efficiency	%	48.8		48.8	
Fuel gas L.H.V.	KJ/Nm ³	≥ 40630		≥ 40600	
NOx Emissions*	ppm	320 or less (O ₂ :0%), 92 or less (O ₂ :15%).			
*Low NOx version (200ppm) on requests.					
Dimensions					
Cylinders No.		12	14	16	18
A	mm	9850	10390	10930	11470
B	mm	3180	3180	3180	3180
C	mm	4980	4980	4980	4980
D	mm	2380	2380	2380	2380
Sets weight	t	76	92	106	120
Engine weight	t	40	48	54	60
Note: All dimensions and weight are approximate value and subject to change without prior notice.					

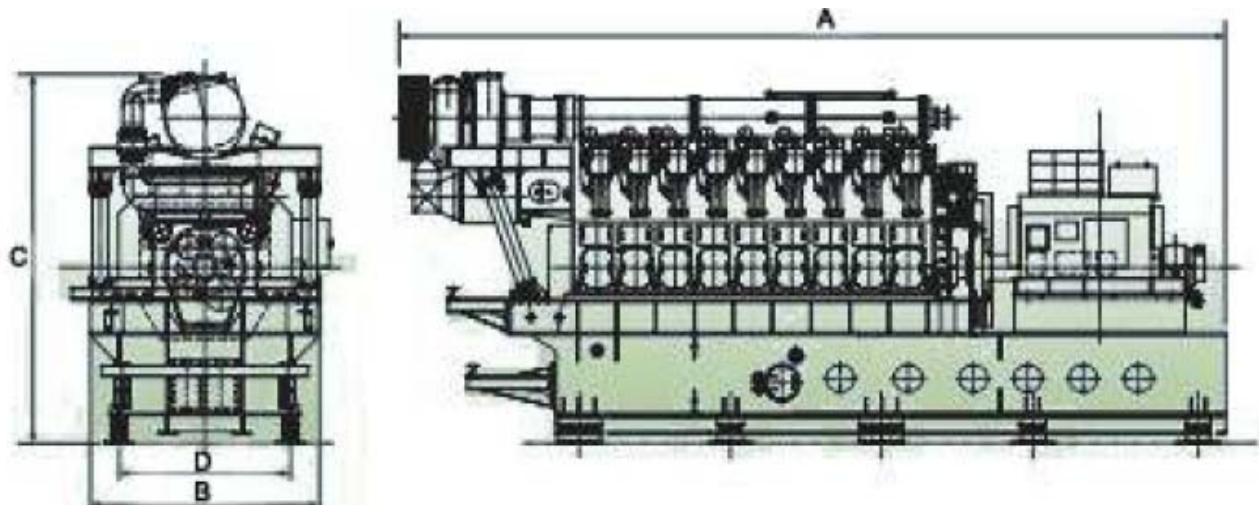

URL: <http://www.soarpower.com>

E-mail: sale@soarpower.com

Phone: +86-4008111308